


# INTERNATIONAL VAURIEN CLASS RULES

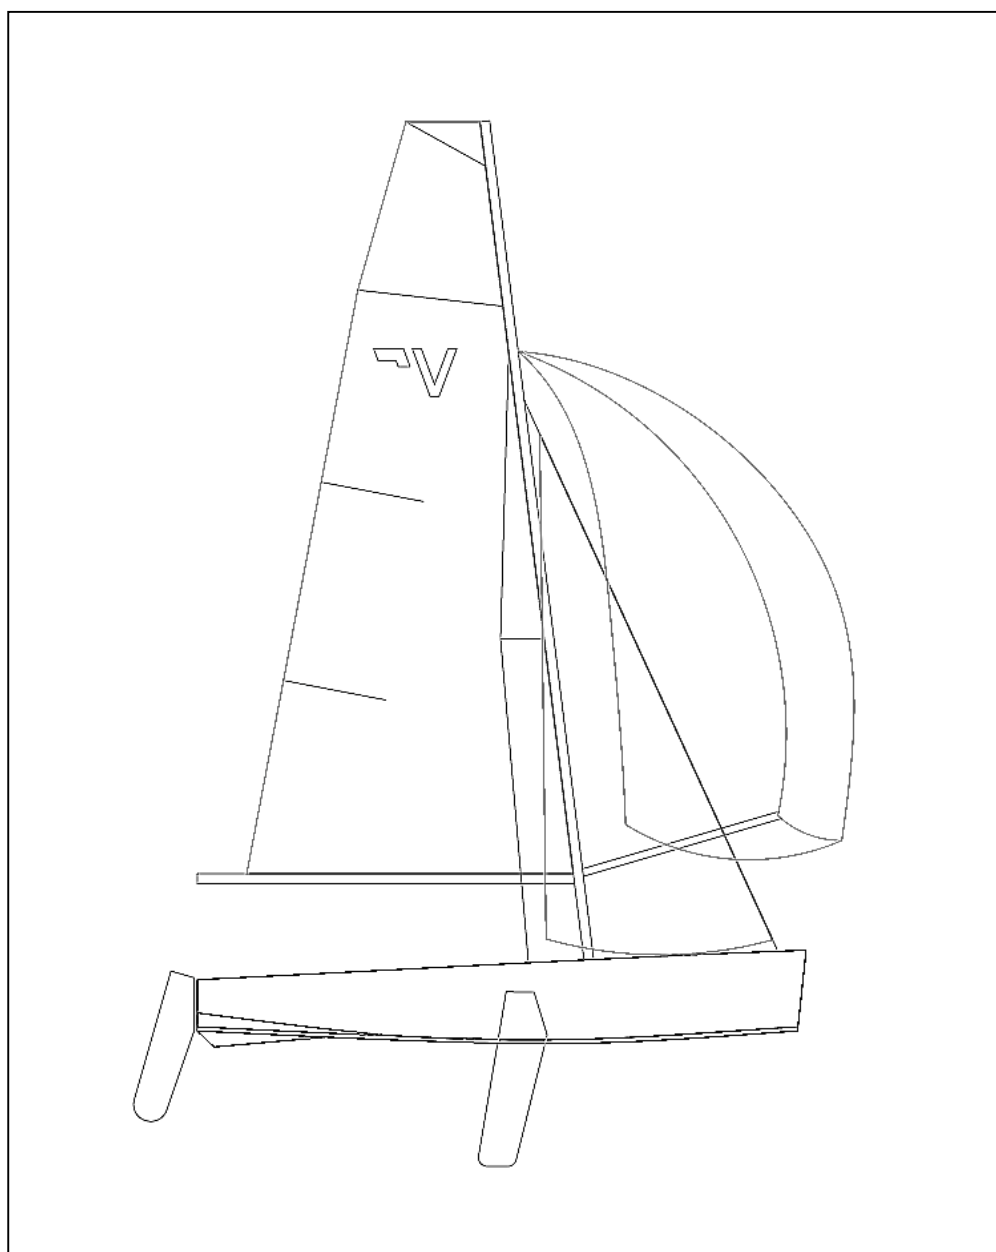

# SAILS RULES AMENDMENT

## ERRATA CORRIGE

This document is aimed to clarify some ambiguous points and rectify some errors in the Sails Rules Amendment 2008.

A.1.4 (b) (4) "Battens shall be fitted into their respective batten pockets when racing, except in the case of accidental loss or damage."

*The meaning is:*

Battens shall be fitted into their respective batten pockets when racing. If they are damaged, they may be left either outside or inside the pocket.

B.3.1 (3) *shall be read as:*

The logos shall be placed back to back with the "flag" pointing to the leech, a "mirrored" version being placed on the back side. The logo shall be placed in close vicinity of the **Three-quarter leech point batten pocket** with a maximum distance to the batten pocket of not more than 100mm. The orientation shall be approximately parallel to the batten pocket."

B.3.2 (a) *shall be read as:*

"The **ply** fibres shall be made of polyester."

B.3.3 (c) *shall be read as:*

"The **sail** shall have a minimum of (3) and a maximum of four (4) batten **pockets** in the **leech**."

The following points at B.3.5 shall be read as:

		minimum	maximum
B.3.5 (3)	<b>Upper width at upper leech point</b> 500mm from <b>head point</b> (only for sails with 4 battens)	450mm	500mm
B.3.5 (19)	Outside <b>batten pocket</b> length : <b>quarter leech point</b> and <b>half leech point battens</b>		700mm
B.3.5 (21)	Distance from <b>head point</b> to intersection of <b>leech</b> and centreline of <b>upper leech point batten pocket</b> (only for sails with 4 battens).	450mm	500mm

B.3.5 (25)	Distance from <b>clew point</b> to intersection of <b>leech</b> and centreline of <b>Quarter Leech Point batten pocket</b>		1300mm
B.3.5 (27)	Distance from <b>head point</b> to intersection of <b>luff</b> and centreline of <b>Three-quarter Leech point batten pocket</b> .	1200mm	1250mm

B.3.5.(22) shall be changed to:

		minimum	maximum
B.3.5 (22)	Distance from head point to intersection of <b>luff</b> and centreline of <b>upper leech point batten pocket</b> (only for sails with 4 battens)		350mm

B.3.5.(26) shall be deleted:

B.3.5 (26)	To be deleted		
---------------	---------------	--	--

B.4.1(a) shall be read as:

“The **ply** fibres shall be made of polyester.”

B.5.1(a) shall be read as:

“The **ply** fibres shall made of polyester or polyamide.”

B.6.3.(3) shall be deleted:

B.6.3 (3)	To be deleted		
--------------	---------------	--	--

